








Tungsten dimmers

Designed for use with Tungsten lighting only (not for use with low voltage lighting, motors, fans or metal halides). This extensive range of dimmers is available in a wide

variety of attractive styles and finishes to suit all modern or traditional interiors.

Finish	 1 Gang 1 Way 400W	 2 Gang 1 Way 250W	 1 Gang 2 Way 400W	 2 Gang 2 Way 250W	 3 Gang 2 Way 250W	 4 Gang 2 Way 250W	 1 Gang 2 Way 800W
White Moulded	1770	1775	1776	1777	1778	1779	1873
Brushed Chrome	3772BC	3775BC	3776BC	3777BC	3778BC	3779BC	
Polished Chrome	3772PC	3775PC	3776PC	3777PC	3778PC	3779PC	
Georgian	3772GB	3775GB	3776GB	3777GB	3778GB	3779GB	
Edwardian	3772EB	3775EB	3776EB	3777EB	3778EB	3779EB	
Flatplate							
Brushed Stainless Steel	5772SB	5775SB	5776SB	5777SB	5778SB	3779SB	
Polished Stainless Steel	5772SP	5775SP	5776SP	5777SP	5778SP	3779SP	
Brushed Brass	5772BB	5775BB	5776BB	5777BB	5778BB	3779BB	
Polished Brass	5772BP	5775BP	5776BP	5777BP	5778BP	3779BP	
Brushed Copper	5772CB	5775CB	5776CB	5777CB	5778CB	3779CB	
Polished Copper	5772CP	5775CP	5776CP	5777CP	5778CP	3779CP	

SALES ENQUIRIES & CUSTOMER SERVICES

Tel: 020 8208 7419 Fax: 020 8208 3340

TECHNICAL SERVICES

Please contact Customer Services for technical queries

EXPORT ENQUIRIES

Tel: 020 8208 7423/7424

FOR GENERAL ASSISTANCE

Tel: 020 8452 6366 Fax: 020 8208 3340

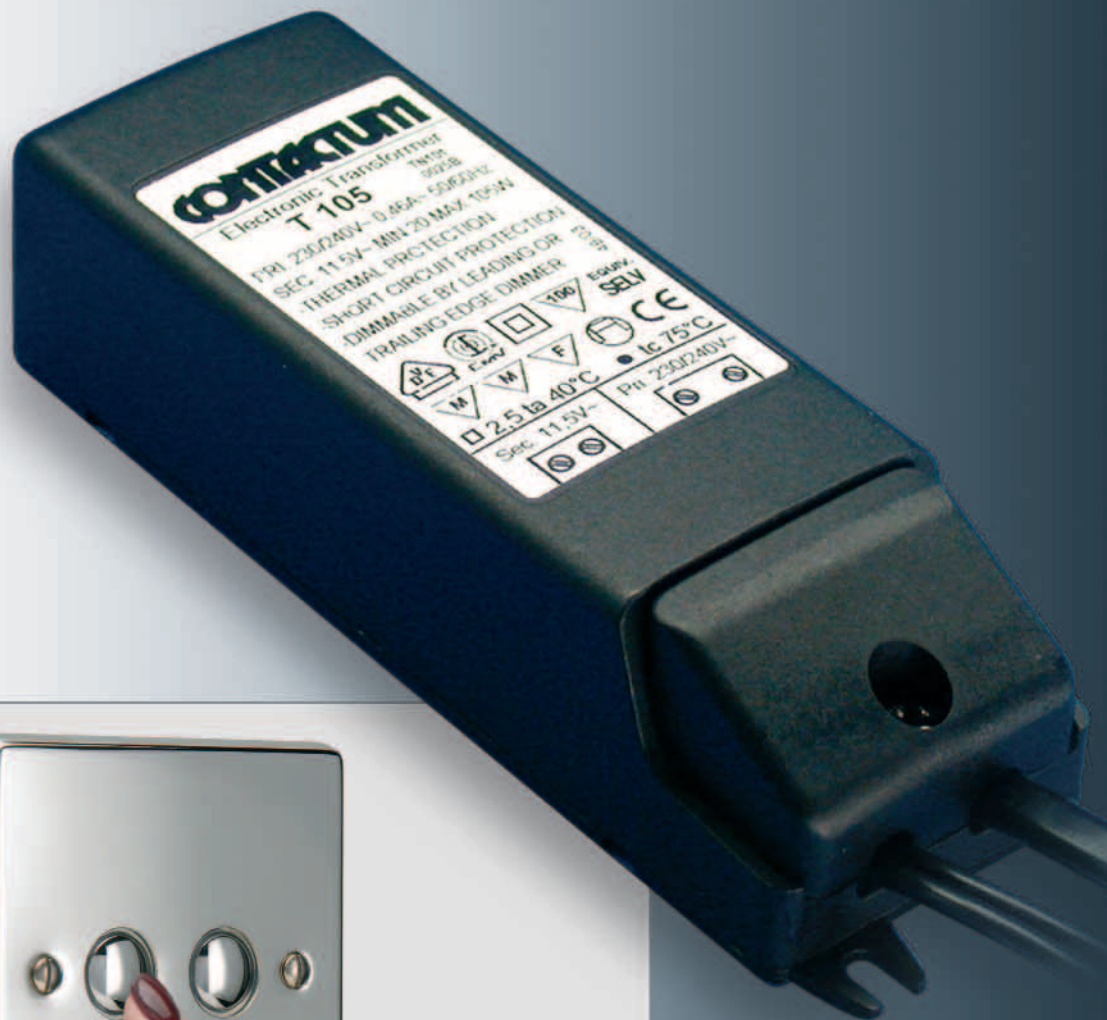
Contactum Limited, Victoria Works,
Edgware Road, Cricklewood, London NW2 6LF

www.contactum.co.uk
enquiries@contactum.co.uk

CONTACTUM

SWITCH WITH CONFIDENCE

transformers and dimmers



CONTACTUM

SWITCH WITH CONFIDENCE



Introducing Contactum's new low voltage electronic transformers and redesigned dimmer range. The expansive range of dimmers, in a variety of styles and finishes are for use with both tungsten and low voltage lighting and

are available with standard, touch or touch/remote control variations. The dimmer range and new low voltage electronic transformers are built to the exacting Contactum standards that guarantee high quality and reliability.

Electronic Transformers- LOW VOLTAGE

Contactum's new, high quality, low voltage electronic transformers are robust, easy to install and totally reliable – making them the perfect choice for architects, contractors and electricians.

T60P

- Electronic Low Voltage Transformer
- Compact size
- 60 VA
- Inlet and outlet terminals on same side

Technical Specifications

Dimensions: 94mm x 31mm x 21mm

Cable Size: 3mm (min) 8mm (max) (external sheath size)



T60

- Electronic Low Voltage Transformer
- 60 VA
- Inlet and outlet terminals on same side

Technical Specifications

Dimensions: 111mm x 39mm x 28mm

Cable Size: 3mm (min) 8mm (max) (external sheath size)



T105

- Electronic Low Voltage Transformer
- Compact size
- 105 VA
- Inlet and outlet terminals on same side

Technical Specifications

Dimensions: 111mm x 39mm x 28mm

Cable Size: 3mm (min) 8mm (max) (external sheath size)



T150

- Electronic Low Voltage Transformer
- 150 VA
- Opposite Inlet and outlet terminals

Technical Specifications

Dimensions: 190mm x 48mm x 40mm (H)








Cable Size: 3mm (min) 8mm (max) (External sheath size)









Intelligent Dimmers – for use with low voltage and Tungsten lighting

These dimmers are compatible with electronic and toroidal transformers (toroidal transformers up to 150VA). This extensive range, available in a variety of styles and

finishes is fully complemented by the new Contactum range of high quality, low voltage electronic transformers T60, T60P, T105, T150.

								
FINNISH	White Moulded	1950	1951	1952	1953	1954	1955	1956
	Brushed Chrome	3950BC	3951BC	3952BC	3953BC	3954BC	3955BC	3956BC
	Polished Chrome	3950PC	3951PC	3952PC	3953PC	3954PC	3955PC	3956PC
	Georgian	3950GB	3951GB	3952GB	3953GB	3954GB	3955GB	3956GB
	Edwardian	3950EB	3951EB	3952EB	3953EB	3954EB	3955EB	3956EB
FLATPLATE	Brushed Stainless Steel	5950SB	5951SB	5952SB	5953SB	5954SB	5955SB	5956SB
	Polished Stainless Steel	5950SP	5951SP	5952SP	5953SP	5954SP	5955SP	5956SP
	Brushed Brass	5950BB	5951BB	5952BB	5953BB	5954BB	5955BB	5956BB
	Polished Brass	5950BP	5951BP	5952BP	5953BP	5954BP	5955BP	5956BP
	Brushed Copper	5950CB	5951CB	5952CB	5953CB	5954CB	5955CB	5956CB
	Polished Copper	5950CP	5951CP	5952CP	5953CP	5954CP	5955CP	5956CP

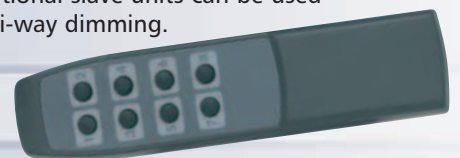
Touch and Touch/Remote Dimmers

								
	Touch Dimmers		Touch & Remote Dimmers		Touch Dimmers			
	1 Gang Multi-Way 400W/320VA Master Unit	2 Gang Multi-Way 250W/200VA Master Unit	1 Gang Multi-Way 400W/320VA Master Unit	2 Gang Multi-Way 250W/200VA Master Unit	1 Gang On/Off Switch Slave Unit	2 Gang On/Off Switch Slave Unit		
FINNISH	Brushed Chrome	3614/4BC	3622/4BC	3614/6BC	3622/6BC	3614/5BC	3622/5BC	One master dimmer unit must be used on each circuit for 2-way or Multi-way dimming for both Touch & Touch/Remote dimmers. An additional slave unit can be used.
	Polished Chrome	3614/4PC	3622/4PC	3614/6PC	3622/6PC	3614/5PC	3622/5PC	
	Georgian	3614/4GB	3622/4GB	3614/6GB	3622/6GB	3614/5GB	3622/5GB	
	Edwardian	3614/4EB	3622/4EB	3614/6EB	3622/6EB	3614/5EB	3622/5EB	
FLATPLATE	Brushed Stainless Steel	5614/4SB	5622/4SB	5614/6SB	5622/6SB	5614/5SB	5622/5SB	
	Polished Stainless Steel	5614/4SP	5622/4SP	5614/6SP	5622/6SP	5614/5SP	5622/5SP	
	Brushed Brass	5614/4BB	5622/4BB	5614/6BB	5622/6BB	5614/5BB	5622/5BB	
	Polished Brass	5614/4BP	5622/4BP	5614/6BP	5622/6BP	5614/5BP	5622/5BP	

The revolutionary and stylish Contactum touch dimmer range offers the benefit of dimming from two or more positions, unlike standard dimmer switches which can only dim from one position.

Contactum's touch and remote dimmers offer the added

benefit of on/off and dimming control from a distance using the discrete, infra-red remote control handset that can control up to 8 dimmers. One master dimmer unit must be used on each circuit - additional slave units can be used for 2-way or multi-way dimming.



Infra red remote control R1

Technical Guidelines

For all products – please ensure that the maximum load connected does not exceed 630W for a single 1-gang plate and 1000W for a double gang. When using Tungsten and Intelligent dimmers with mains voltage Tungsten

Halogen, de-rate by 50%. When using Intelligent and Touch/Remote dimmers with low voltage lighting please de-rate by 20% to allow for transformer losses, i.e. 400W dimmer can dim up to 320VA. For Touch/Remote dimmers you do not have de-rate when using with Halogen lighting.

Note: These products are not suitable for use with fans, motors or metal halides.